




TF "Olga & Co", 105-B, Levitana Street, Odessa, 65114, Ukraine
Tel/fax: (048) 728-3000, 746-29-76, 746-35-39, E-mail: info@crystalseal.com, <http://www.crystalseal.com>

"KROK" Security Seal

"KROK" security seal is designed for sealing test equipment, distribution cabinets, sensors, reservoirs, rooms, containers, vans and many other objects for sealing reliability control of which making pull-up of flexible-body is necessary.

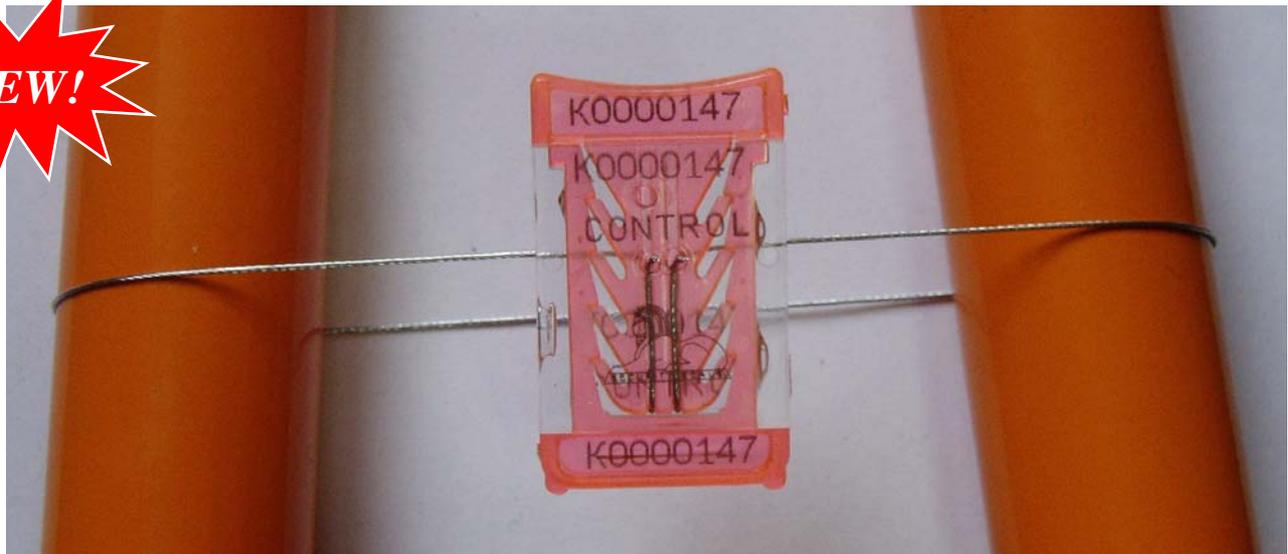

Advantages of "KROK" Security Seal:

- ✓ 7 (seven) levels of protection!
- ✓ Possibility of placing with pull-up of flexible-body!
- ✓ Maximum indicator activity!
- ✓ The own glowing in UV light!
- ✓ Possibility of making with hard variant of number and logotype!
- ✓ Possibility of making with graphic customer's logotype!
- ✓ Possibility of making with fixed length of flexible-body!
- ✓ Convenient packing!

7 (seven) Levels of Protection of "KROK" Security Seal:



1. Individual eight-digit number and individual graphic and/or alphanumeric logotype
2. Dubbing of the full sequential number on all parts of the seal
3. Non-recurrent sequential enumeration of seals
4. Protection against changing customer's number and logotype (placing the number and logotype in the seal body according to special technology, not using colorants)
5. Protection of bending cue against removal (lugs of fir-tree cue)
6. Protection of fir-tree cue against removal (dovetails of bending cue, recesses in the seal body)
7. Protection of sealing wire against changing it (transparent seal body)

The own glowing in UV light:




Having glowing effect in UV light, “KROK” seal allows control of keeping the sealed object intact in hard-to-reach and darkened places.

UV light sources are supplied in the set with lot of seals free, in necessary quantity.

Rules of Placing “KROK” Security Seal:




1. Thread free ends of flexible-body through holes in seal body, moving the seal closer to the minimum distance to the object being sealed.

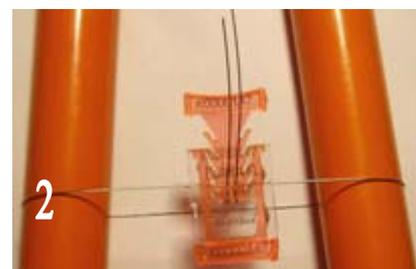


2,3,4. Holding the seal at the minimum distance from the object of sealing, push in the bending cue into the bottom of fir-tree cue until bumping.



5. Nip free overhung ends of flexible-body.

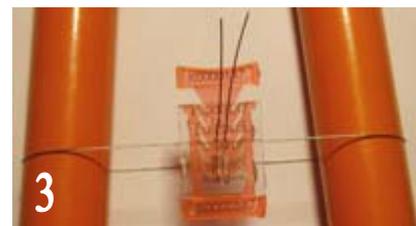

6. The seal has been placed.

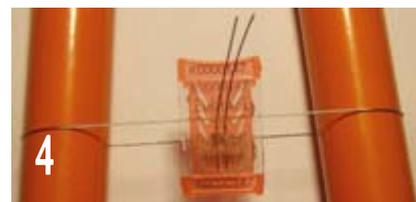

Rules of Checking a Placed “KROK” Security Seal:

1. Check correspondence of number and logotype of the examined seal to the number and logotype mentioned in the log.
2. Check correspondence of numbers on the body and cue of the seal being inspected.
3. Check absence of action traces onto the seal body and cues.
4. Check consistency of sealing wire (visually and manually).

Recordkeeping Rules of “KROK” Security Seals:

Numbers of all the placed (removed) seals should be entered in the log containing the following information:

- Location of placing (removing) the seal.
- Date and time of placing (removing) the seal.
- Instrument number and readings.
- Name and signature of the person who placed (removed) the seal.
- Name and signature of the person who inspected the object of sealing.

Conditions of Ordering “KROK” Security Seals*:

Order of KROK security seals is accepted in accordance of any findings of examining a written application of the customer (being a juridical person) containing the following information:

1. Name, rank, requisites of an enterprise – customer.
2. Name and type of object of sealing.
3. The volume of non-recurring supply (pieces).
4. Exercising date of supply
5. Logotype (graphic or alphanumeric).
6. Color of cues.
7. Variant of making the number and logotype (colorless or hard).

***It is impossible to order seal enumeration. Seals are supplied with continuous, sequential, non-recurring numbering.**

Warranties:

1. **Security Seals™ guarantees absence of possibility to open and place again KROK security seal illegally without making traces!**
2. **Security Seals™ guarantees absence of possibility to produce KROK security seal illegally!**

Protecting your interests we care for our name!